



# VÝLOŽNÍKY BRACKETS

**V 1D**

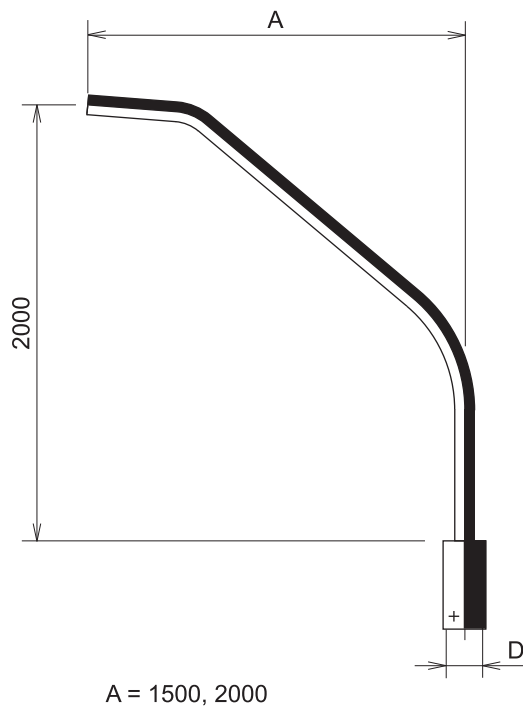

**V 2D**

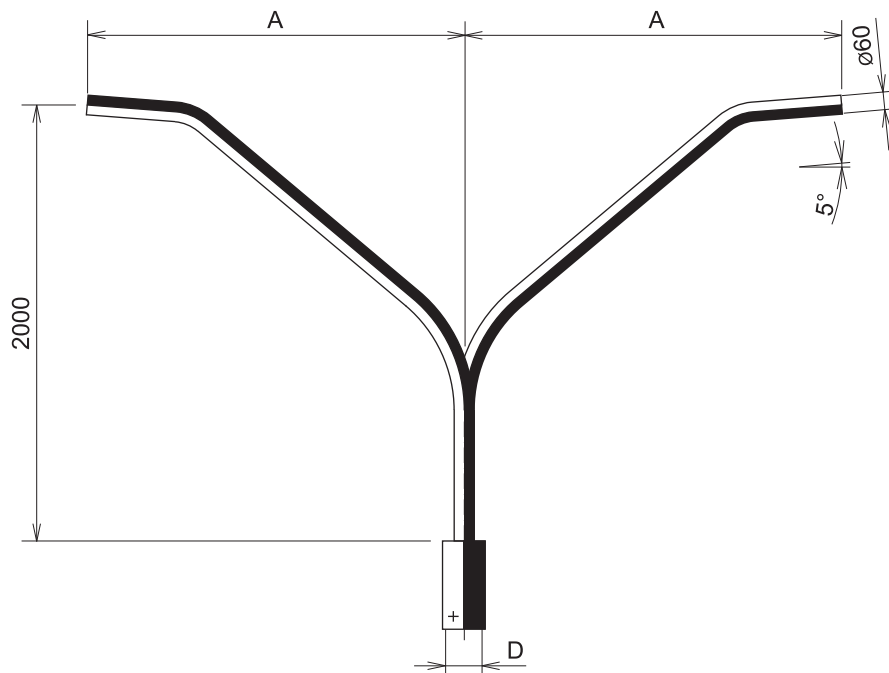

TYP/ TYPE	A (mm)	Vietor/Wind 24m /s				Vietor/Wind 26m /s				Hmotnosť výložníka Weight of bracket (kg) (kg)	
		Kategória terénu/Terrain category				Kategória terénu/Terrain category				(D89)	(D114)
		I.	II.	III.	IV.	I.	II.	III.	IV.		
V1D-15-D	1500	0,74	0,62	0,48	0,45	0,82	0,72	0,56	0,54	21,0	22,0
V1D-20-D	2000	0,94	0,80	0,62	0,59	1,07	0,92	0,73	0,70	24,0	25,0
V2D-15-D	1500	0,84	0,72	0,54	0,50	1,00	0,84	0,64	0,62	34,0	35,0
V2D-20-D	2000	1,00	0,84	0,64	0,60	1,16	0,98	0,76	0,72	40,0	41,0

Porovnávacia plocha vypočítaná zo zaťaženia svetidlom o návetornej ploche 0,15 m<sup>2</sup> a hmotnosti 15kg.  
Comparative surface is calculated from load of lamp of 0,15m<sup>2</sup> windward area and of 15kg weight.

Návod na priradenie výložníka pomocou porovnávacej plochy str. 49.  
Selection of brackets by „comparative surface area“ page 50.